

# Lead2Passed



Lead2Passed

HOME

ALL VENDORS

★ GUARANTEE

? FAQ

TESTIMONIALS

Login / Register My Shopcart (1)

Input your exam code ...



## Try before you buy

Download a free sample of any of our exam questions and answers

- ✓ Online Test Engine: Online Tool, Convenient, easy to study. Instant Online Access. Supports All Web Browsers.
- ✓ PDF format: Easy to read and print learning materials, our products are available in PDF file format.
- ✓ Desktop Test Engine: Installable Software Application. Simulates Real Exam Environment. Practice Offline Anytime.



### Security & Privacy

We respect customer privacy. We use McAfee's security service to provide you with utmost security for your personal information & peace of mind.



### 365 Days Free Updates

Free update is available within 365 days after your purchase. After 365 days, you will get 50% discounts for updating.



### Money Back Guarantee

Full refund if you fail the corresponding exam in 60 days after purchasing. And Free get any another product.



### Instant Download

After Payment, our system will send you the products you purchase in mailbox in a minute after payment. If not received within 2 hours, please contact us.

<http://www.lead2passed.com>

Valid Certification Exam Dumps Materials and Study Guide -  
Lead2Passed

**Exam** : **NS0-502**

**Title** : NetApp Certified  
Implementation Engineer-SAN  
and Virtualization

**Vendor** : Network Appliance

**Version** : DEMO

NO.1 An organization currently has a NetApp Fibre Channel block-based solution. With limited budget and resources, they want to create a new disaster recovery site that utilizes a NetApp solution. What would the optimal solution include?

- A.SnapMover and Fibre Channel at the disaster recovery site for all hosts
- B.SnapMirror and iSCSI at the disaster recovery site for all hosts
- C.Fibre Channel at both locations using ftp to replicate storage
- D.MetroCluster and NAS

**Answer:** B


NO.2 Click the Exhibit Button The table highlights the space management policy that is defined for a particular flexvol, acmevol. Based on the information provided in the table, which action will the storage controller take when it runs out of space in the volume?

|                    |               |
|--------------------|---------------|
| Guarantee          | = none        |
| LUN Reservation    | = on          |
| Fractional_reserve | = 0%          |
| Snap_reserve       | = 0%          |
| Auto_delete        | = volume      |
| Auto_grow          | = off         |
| Try_first          | = snap_delete |

- A.It will try deleting Snapshot copies first to reclaim space before trying to grow the volume.
- B.It will grow the volume before deleting Snapshot copies.
- C.It will only try deleting Snapshot copies to reclaim space and will not grow the volume.
- D.It is irrelevant since fractional\_reserve is 0%.

**Answer:** C

NO.3 Click the Exhibit button.

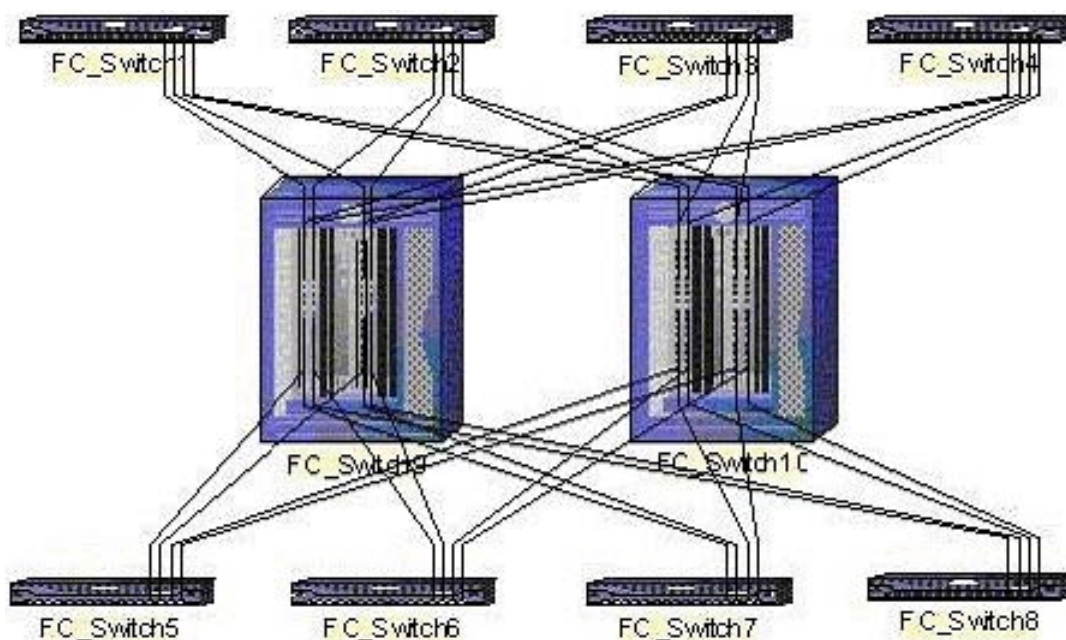

Based on the diagram shown, what is the appropriate FC switch topology?

- A. full mesh
- B. core-edge
- C. full cascade
- D. partial mesh


**Answer:** B

NO.4 Which three steps are required to make a LUN visible to a NPIV-supported VM? (Choose three.)

- A. Map a LUN to the igroup containing the NPIV WWPNs.
- B. Configure a matching NPIV port on the NetApp controller.
- C. Set options.npiv.enable to TRUE on the NetApp controller.
- D. Create a zone containing NetApp target ports and NPIV WWPNs.
- E. Create an igroup on the NetApp controller containing the NPIV WWPNs.

**Answer:** A,D,E

NO.5 Click the Exhibit button.

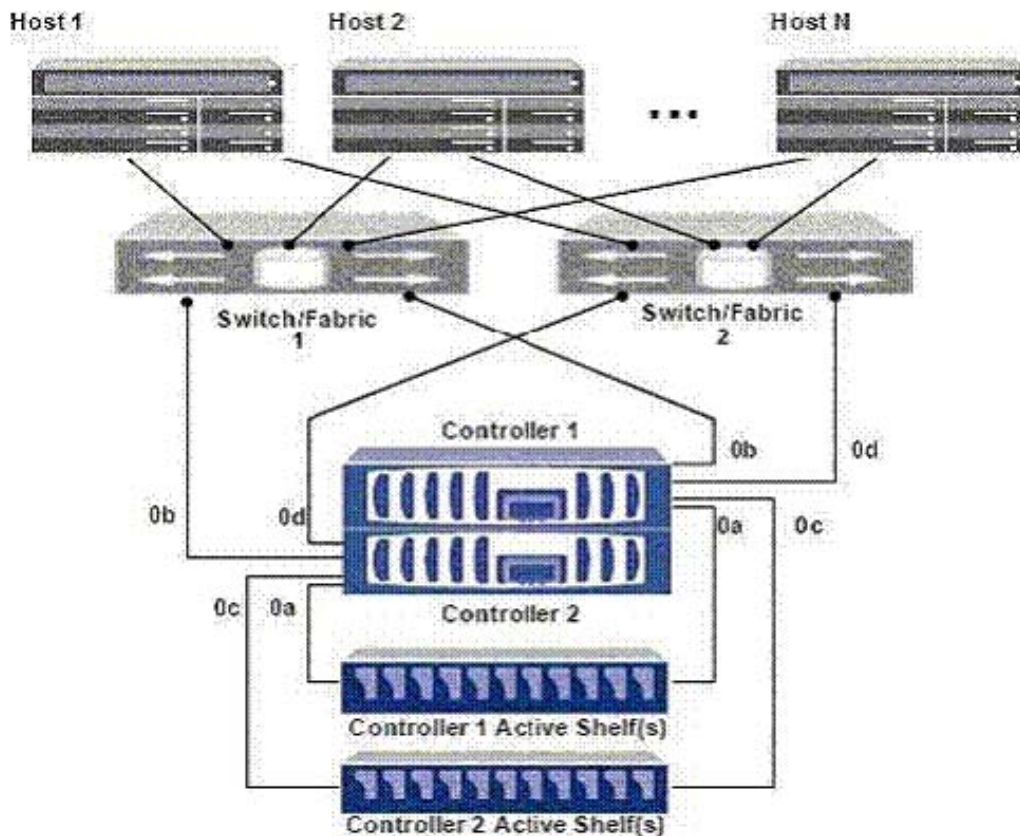

In the diagram shown, a portset is created on controller 1 with the command: `controller1>portset create -f ntapportset controller1:0b`. This portset is bound to the igroup with all the initiators in it. How many paths can the host 1 see to a LUN on controller 1?

- A.six paths
- B.four paths
- C.three paths
- D.one path

**Answer:** D

NO.6 A company has deployed a NetApp dual controller FAS3100 series with iSCSI. Currently, there are five Windows servers and three Novell NetWare servers connected to the IP SAN. The customer wants to connect an HP-UX server to the IP SAN.

Which cfmode allows all operating systems to co-exist in the IP SAN?

- A.single\_image
- B.standby
- C.cfmode not applicable
- D.dual\_fabric

**Answer:** C

NO.7 When setting up a VLAN for administrative security purposes, which four ports are the only important ports to include in the VLAN? (Choose four.)

- A.Storage Controllers Management Ethernet ports
- B.FC Switches Ethernet port
- C.Hosts iSCSI HBA Ethernet port

- D.Ethernet Switches Management port
- E.Storage Controller iSCSI Ethernet Target ports
- F.Hosts NIC Ethernet port

**Answer:** A,B,D,F

NO.8 After completing the configuration of a new Brocade Fibre Channel switch, which command do you use to verify your configuration?

- A.switchshow
- B.show config
- C.configshow
- D.cfgshow

**Answer:** C

NO.9 Which type of zoning does NetApp recommend?

- A.World Wide Name zoning
- B.World Wide Port Name zoning
- C.World Wide Node Name zoning
- D.Switch World Wide Name zoning

**Answer:** B

NO.10 Click the Exhibit button.

```
ISCI: iswta,  
Authentication failed  
for initiator  
<nodename>
```

You see the following error on the storage controller's console or messages file. What is the most likely cause for this error?

- A.portal group misconfiguration
- B.iSCSI CHAP misconfiguration
- C.iSNS misconfiguration
- D.IPsec misconfiguration

**Answer:** B